



FITTING INSTRUCTIONS
For Navarapart D23/NP300
Raised/Sliding console lid
SKU: PAP-D23ARE

This Raised Console lid is designed to offer more support for the driver to lean on, it can also be slid forwards to accommodate for drivers who have their seat positioned further forwards.



1. Start by Opening the Console in your car, and remove the 4 Phillips head screws holding the plastic trim on the underside in place.




2. Once all screws are removed gently pry the plastic base/trim off the underside of the console lid.



3. Remove the 4 Silver Phillips head screws Holding the Console Lid to the metal frame and remove the console lid from the frame.



4. Remove the 6 screws holding the plastic base plate to the new console lid, and gently pry off to separate the console lid into 2 halves.

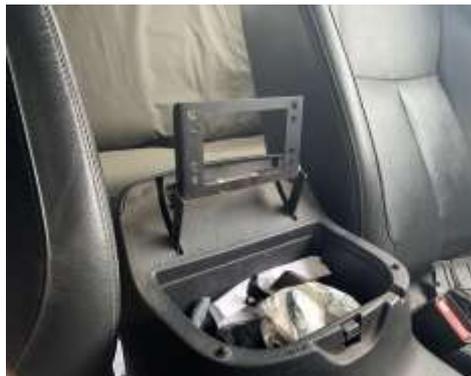


5. Remove the Spring and latch from the original console. Pay attention to the spring orientation.


Disassemble by sliding the retaining pin out.




6. refit in the exact same orientation on the new console lid.

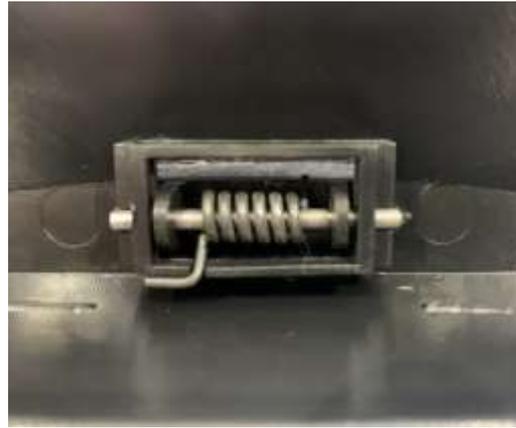

7. Fit the New Console Lid to the metal frame in the vehicle and re-install the original 4x silver screws.

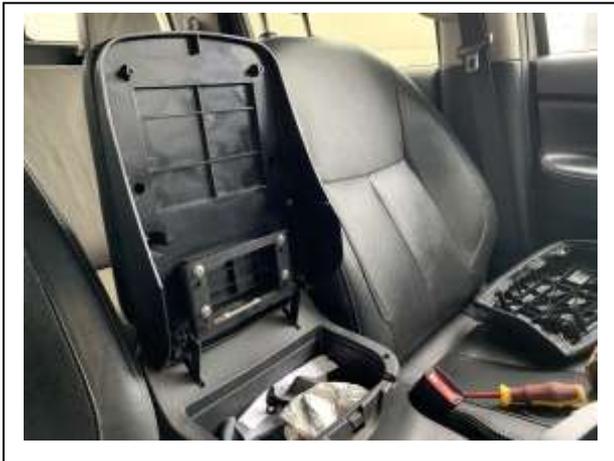

8. Fit the Console lid Lower Trim (with the latch installed) and re-fit the 6 black Phillips head screws previously removed.

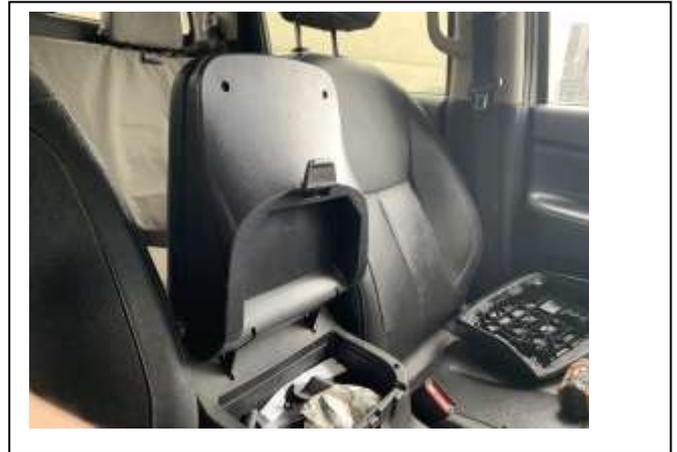

9. Ensure the Console Latch, latches properly and releases easily. The spring should hold it in the closed position.

Ensure the console Slides back and forward with no restriction.

